

PROJECT: _____

TYPE: _____

CAT #: _____


DESCRIPTION

Micro, Integrated Modular, Brass - Antique, 5.5W, 435 Lm, 3000K, 60°, 10-15V

SPECIFICATIONS


Construction	Brass
Finish	Antique
Lead Wire	6'
Voltage	10-15V
Light Warranty	10 Years

FINISHES



NOTES

Micro Module

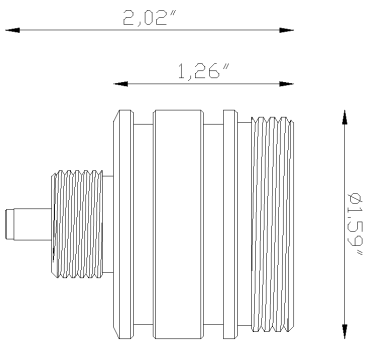

	CORE	CORE	PRO	PRO
	M4B1-3.5W-27K-40-A M4B1-3.5W-27K-60-A M4B1-3.5W-30K-40-A M4B1-3.5W-30K-60-A	M4B1-5.5W-27K-40-A M4B1-5.5W-27K-60-A M4B1-5.5W-30K-40-A M4B1-5.5W-30K-60-A	M7B1-4.5W-40-A M7B1-4.5W-40-BK M7B1-4.5W-60-A	M8B1-3W-27K-40-A M8B1-3W-27K-40-BK M8B1-3W-30K-40-A M8B1-3W-30K-40-BK
Construction	Brass	Brass	Brass	Brass
Finish	Antique	Antique	Black, Antique	Antique, Black
Input Voltage	10-15V	10-15V	10-15V	10-15V
Wattage (Volt Amps)	3.5W (5.59)	5.5W (8.66)	4.5W (7.66)	3W (4.83)
Module Lumens	325 Lm	435 Lm	350 Lm	158 Lm
Color Temperature	2700K, 3000K	2700K, 3000K	2700-5700K	2700-5700K
Beam Spread	40°, 60°	40°, 60°	40°, 60°	40°
Lead Wire Length	6'	6'	6'	6'
CRI	80+	80+	80+	80+
RGB	No	No	No	Yes
Dimmable	Primary Dimming	Primary Dimming	Primary Dimming	Primary Dimming
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	10 Years	10 Years	10 Years	10 Years
Core Drill Size	-	-	-	-