

EVO™ EP-31 Petite Path Light



PROJECT
CATALOG #
TYPE
NOTES

Ideal for any path or area lighting project, the 15" (387 mm) Evo™ EP-31 Petite Path Light features a small footprint along with a globe-style lens and built-in shade reflector for optimum lumen output. It also includes a 12" (305 mm) riser, a 5" (127 mm) diameter top hat/shade, and a nitrile O-ring for exceptional weatherproof sealing.

As part of the Evo Collection™, this injection-molded fixture reduces environmental impact with recycled composite construction build while offering a lower-cost option that doesn't sacrifice on design or output. Developed for simplicity, it comes with a G4 LED Lamp and is available in a black finish that blends into the landscape.

Quick Facts

- Eco-friendly, composite construction minimizes environmental impact
- Lower-cost option is ideal for basic installations and budget-conscious customers
- UV-tested, corrosion-proof materials withstand coastal areas with saline environments
- Compatible with standard G4 LED Lamps and accessories for convenience and long-term performance



EVO™ EP-31 Petite Path Light SPECIFICATIONS

	E2W
Total Lumens (lm)	125
Input Voltage (VAC/VDC)	10 to 15
Power Consumption (VA)	1.7
Efficacy (lm/W)	47
Color Rendering Index (CRI)	82+
Maximum Candela (cd)	41
Minimum Rated Life (L70)	33,000 Hrs

EVO™ EP-31 Petite Path Light SPECIFICATIONS

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

Materials

Composite

LED

G4 LED Max wattage/va (3va)

Finish

Black, textured composite

Hardware

Super Slot Spike

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 3' (1 m) measured from the lamp base

Sockets

Socket contains MoistureBlock™ Technology, preventing moisture from wicking up into sealed areas of the fixture.G4 Bi-pin

Weight

0.6 lb (0.25 kg)

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Power Consumption

Specified power consumption of (VA) indicates the full apparent power

Housing Capacity

Max (3 VA) 35 W G4 LED Equivalent

Lens Transparency

Frosted

Manufacturing

ISO 9001:2015 certified facility

Lifetime

Eco: >30,000 Hrs (L70, B10, TM21 Reported)

Warranty

Fixture: 3-year limited warranty. Included lamp: 3-year limited warranty

Listings



[field_spec_builder_mount] [field_spec_builder_mount]

Fixture	Power	Riser Height	Compliance	Finish
EP-31	E2W 1.3 VA, 2700K G4 lamp (20 W equivalent lamp)	12R	[default] North America (UL Listed) E International (CE Certified)	BC Black Composite


-

-







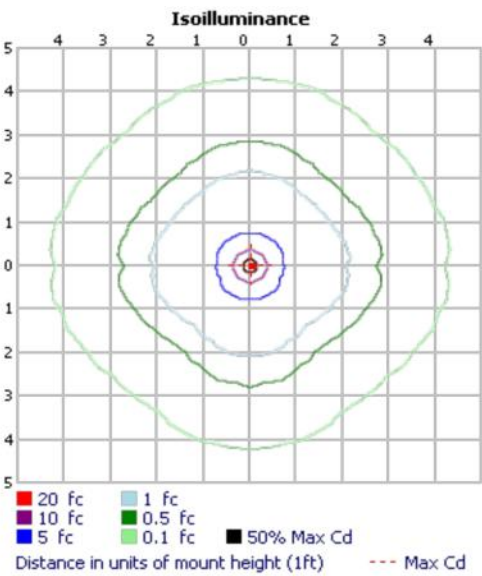




-

-

EXAMPLE FIXTURE CONFIGURATION:EP-31-E3W-X-BC




















MOUNTING OPTIONS: Specify Separately




Mounts	Catalog No.		Mounts	Catalog No.	
Long Slot Spike	250015840000		Three-Prong Spike	250020020000	
Super Slot Spike	753900		CE Certified Spike	eKitSpike	
Ground Mount for 2.0" Schedule 40 Post Mounting with ½" Thread	GM-XX*		Line Mount	LNМ	
ProAim® Ratcheting Spike	PARS		Post Mount for 1.5" Schedule 40 Post Mounting with ½" Thread	PM-XX*	
Super J-Box Spike	SJ-XX*		VersaBox® Mount with ½" Thread	VB-050-XX*	
Variable Height Riser for Up Lights	VHR-UL				


EVO™ EP-31 Petite Path Light ORDERING INFORMATION

POWER OPTIONS: Specify Separately

Power	Catalog No.		Power	Catalog No.	
Low-Voltage Dimmer	DIM-LV		DX Controller, 150 W, Matte Gray	DX150M	
DX Controller, 150 W, Stainless Steel	DX150SS		DX Controller, 300 W, Matte Gray	DX300M	
DX Controller, 300 W, Stainless Steel	DX300SS		EX Transformer, 150 W, Matte Gray	EX-150-M	
EX Transformer, 150 W, Stainless Steel	EX-150-SS		Luxor CUBE- Low-voltage	LCM-LV	
Mini Plug-In Transformer, 30 W	MT-30W		Plug-In Transformer, 6 W	MT-6W	
PX Transformer, 300 W	PX-300-SS		PX Transformer, 600 W	PX-600-SS	
PX Transformer, 900 W	PX-900-SS		Step-Down Transformer, Dimmable (120 V to 12 V)	ST-120-DIM	
Step-Down Transformer (120V to 12V)	ST-HV		Step-Down Transformer, UV (120/277 V to 12 V)	ST-UV	
Surge Protection Module	SURGE-MOD				

SPLICING OPTIONS: Specify Separately

Splicing	Catalog No.	
Brass Lug Wire Connectors, 2-pack	WCHSBS2	
Heat Shrink Wire Connectors, 20-pack, Medium	WCHSMD20	
Ratcheting Crimper Tool	WCHSTOOL	

Splicing	Catalog No.	
Brass Lug Wire Connectors, 50-item Bulk Pack	WCHSBS50	
Heat Shrink Wire Connectors, 20-pack, Small	WCHSSM20	